
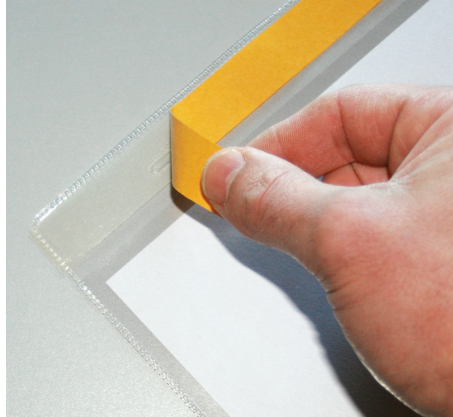


PRODUCT SPECIFICATION SHEET

Document Pockets - Self-adhesive and Magnetic

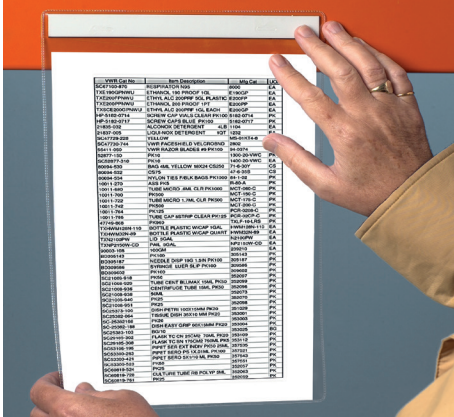

Catalogue Text

- Industrial quality pockets with strong welded edges
- Keeps documentation clean
- Suits A3, A4, A5, A6 & A7 inserts
- Vertical and horizontal formats

Material Specification

PVC Pocket

Transparent– UV ray resistant
Prolonged use at high temperatures can lead to distortion. Prolonged use at low temperatures can lead to brittleness.

Magnetic Strip

Magnetic strontium based extrusion, 20mm wide.

Adhesive Strip

Polyester based tape with acrylic adhesive
Temperature range -40°C to +160°C, short periods up to +180°C.

Specific weight	1.29g/cm ³	DIN53479
Elongation at Break N/mm ²	31 Length,28 width	DIN53455
Elongation %	270 Length and width	DIN53455
Shore hardness	97A, 55D	DIN53505/10 sec
Shrinkage	1.5%	10 min@80°C
Temperature resistance	-5°C to +30°C	DIN53372
Impact resistance	30 KV/mm	DIN53481
Water Absorption	0.4%	DIN53495
Dialectic figure	3.7@100Hz,3.4@10KHz	DIN53483
Dialectic loss factor	6.3@100Hz,5.2@10KHz	DIN53483

Magnetic extrusion thickness	1.5mm
Single side Multiple magnetised	Mag A or Mag B
Magnetic pull	54g/cm ²
Temperature resistance	-30°C to +55°C
Magnetic loss occurs	Above 50°C
BH(Max)	0.6-0.8 MGOe