


PRODUCT SPECIFICATION SHEET

Floor Identification Markers -

FMC A-Z and 0-9

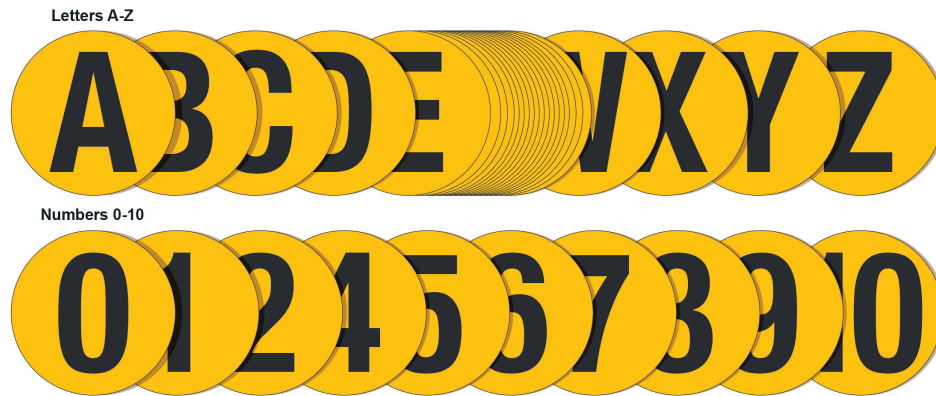

Catalogue Text

- Clear and robust floor markers
- 190mm diameter
- Black characters on yellow background

A high visibility floor marker designed to cope with the daily stresses and strains of a modern warehouse. All markers incorporate a permanent aggressive adhesive backing and can be used not just on the floor but any dry, clean flat sealed surface. The 190mm diameter markers are printed with a bold black character on a yellow background.

Material Specification

Facestock Material
PVC Laminated with
double sided
(self-adhesive) tape

Parameter	Specification	Test Method
PVC	0.3mm rigid film	
Self-adhesive	0.095mm	
Type of adhesive	Solvent acrylic (0.082mm)	
Initial Tack	12 cm	PSTC-6
Peel adhesion	1.3 kg/25.4mm ²	PSTC-1
Holding power	Over 1hr.25.4mm ²	PSTC-7
Resistance to water	10 months	PSTC-35
Resistance to chemicals	8 months	PSTC-35
Resistance to motor oil	Excellent	PSTC-35
Temperature range	-30°C ~ +70°C	See below
Slip assessment Dry pendulum	66 median Low Slip Risk	PTV@45°+90°

The Independent test laboratory at Adhesive Technical Services Ltd performed the temperature test, England.
(test results available)

NB All wet floors are hazardous so slip risk when wet not specified.