
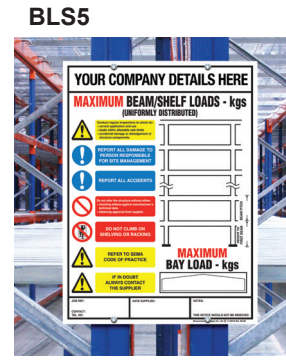

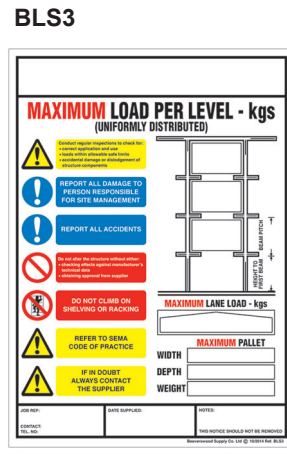


Weight Load Identification Notices

BLS1 - BLS8

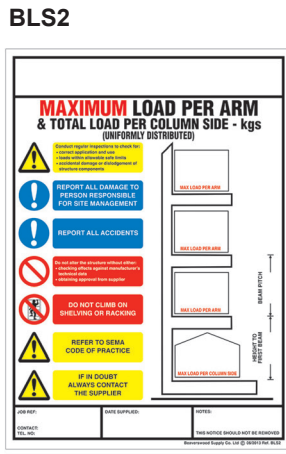

Catalogue Text

- Rigid PVC and Styrene notices to identify weight limits and safety procedures
- Can be overprinted in black with load information and company details

The range includes notices for shelving, pallet racking, cantilever racking, drive-thru racking and mezzanine floors. They all conform to the latest Health and Safety recommendations.

Material Specification

High impact PVC
0.6mm thick +/- 5%
Opaque white
Gloss/ Gloss finish

High impact polystyrene
1.5mm thick
Opaque white
High gloss/ Matt finish

Property	Value	Test Method
Density	1.36-1.40 g/m ²	ISO 1183
Tensile strength	45 MPa	ISO 527
Impact strength	550 kJ/m ²	ISO 8256
VICAT softening point	72-76°C	ISO 306
Max temp without change	55	DIN 53377
Cold break temp	10 months	DIN 1876
Surface reflection	8 months	DIN 67530

Property	Value	Test Method
Density	1.05 g/m ²	ISO 1183
Tensile strength	40 MPa	ISO 527
Impact strength	70 MPa	ISO 178
VICAT softening point	90 J/M (23°C)	ISO 180
Max temp without change	88-90°C	DIN 306
Cold break temp	80°C (1.8MPa)	DIN 75
Surface reflection	HB @ 1.5mm	DIN 94

BLS1, BLS2, BLS3, BLS8 -

0.6mm PVC portrait 356mm x 254mm

BLS4 - 0.6mm PVC landscape 254mm x 356mm

BLS6 - 1.5mm Styrene landscape 297mm x 420mm

BLS7 - 1.5mm Styrene landscape 215mm x 220mm