


# Conductive Neoprene Bench/Floor Mat

Extra tough conductive matting



- Heavy-duty neoprene rubber for demanding environments.
- Suitable as an ESD work surface mat or hardwearing anti-static floor mat.
- Solder iron resistant and low reflecting, ideal for electrical component manufacturing and refurbishment.
- Hardwearing Neoprene is heat, chemical, oil, fire and ozone resistant.
- Grounded via a 10 mm male stud fitted to the mat.
- Conforms to IEC 61340-5-1.
- Point to point resistance (Rp-p):  $1.8 \times 10^8 \Omega$
- Resistance to a groundable point (Rgp):  $4.3 \times 10^6 \Omega$

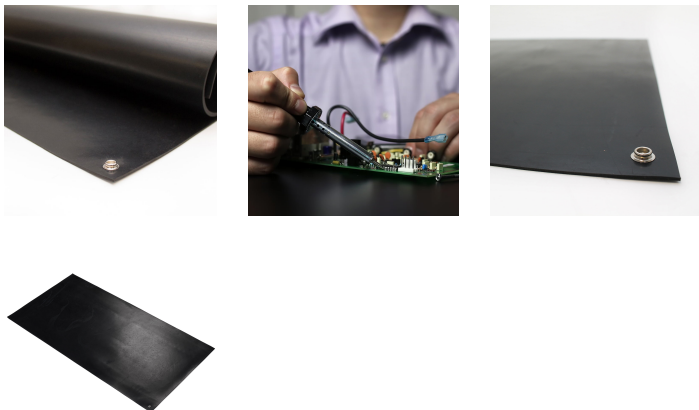

## Parts

Part Number	Size	Colour	Weight (kg)
-------------	------	--------	-------------

## Technical Specifications

Material	NBR
Surface Finish	Smooth
Product Height	2 mm
Min. Operating Temperature	-30°C
Max. Operating Temperature	+70°C
Environmental Resistance	Suitable for dry indoor environments
Accessories	ESD accessories available
COO (Country of Origin)	CN

## Additional Information



Conductive Neoprene ESD Test IEC 61340.jpeg

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email [sales@cobaeurope.com](mailto:sales@cobaeurope.com)

[www.cobaeurope.com](http://www.cobaeurope.com)