



DeckStep


Ribbed vinyl matting for swimming pools




- Raise people's feet off wet floor surfaces.
- Reduce the risk of slips by keeping feet above surface water.
- Provides a more comfortable barefoot walking surface than tiled floors.
- Textured surface provides slip resistance.
- Flexible and lightweight – easy to move and clean.
- Ribs are welded together for strength.
- Slip tested to DIN 51097.




Styles Available




Red




Grey



Green

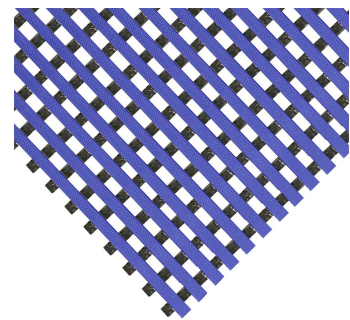

Blue



Black

Parts

Part Number	Size	Colour	Weight (kg)
DS010610	0.59 m x 10 m	Black	45
DS010610C	0.59 m x per linear metre	Black	4.5
DS011010	1.0 m x 10 m	Black	75
DS011010C	1.0 m x per linear metre	Black	7.5
DS011210	1.2 m x 10 m	Black	90
DS011210C	1.2 m x per linear metre	Black	9
DS020610	0.59 m x 10 m	Blue	45
DS020610C	0.59 m x per linear metre	Blue	4.5
DS021010	1.0 m x 10 m	Blue	75
DS021010C	1.0 m x per linear metre	Blue	7.5
DS021210	1.2 m x 10 m	Blue	90
DS021210C	1.2 m x per linear metre	Blue	9
DS030610	0.59 m x 10 m	Red	45
DS030610C	0.59 m x per linear metre	Red	4.5
DS031010	1.0 m x 10 m	Red	75
DS031010C	1.0 m x per linear metre	Red	7.5
DS031210	1.2 m x 10 m	Red	90
DS031210C	1.2 m x per linear metre	Red	9
DS040610	0.59 m x 10 m	Green	45
DS040610C	0.59 m x per linear metre	Green	4.5
DS041010	1.0 m x 10 m	Green	75
DS041010C	1.0 m x per linear metre	Green	7.5
DS041210	1.2 m x 10 m	Green	90
DS041210C	1.2 m x per linear metre	Green	9
DS060610	0.59 m x 10 m	Grey	45
DS060610C	0.59 m x per linear metre	Grey	4.5
DS061010	1.0 m x 10 m	Grey	75
DS061010C	1.0 m x per linear metre	Grey	7.5
DS061210	1.2 m x 10 m	Grey	90
DS061210C	1.2 m x per linear metre	Grey	9

Technical Specifications

Material	PVC
Surface Finish	Cross ribbed lattice
Product Height	11.5 mm ±0.5 mm
Product Weight	7.5 kg / m ²
Min. Operating Temperature	-30°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	Resistant to acid and alkali
Environmental Resistance	Suitable for wet and dry indoor environments
Typical Applications	General industrial, Production lines, Assembly areas, Packing stations, Workbenches. Swimming pools, Changing rooms, Showers, Gyms.
Installation Method	Loose lay
Cleaning Method	Easily cleaned with hot soapy water or pressure washer
COO (Country of Origin)	CN
Slip Tested to	DIN 51130 - R10

Additional Information



Deckstep DIN 51097 Ramp Slip Test



Deckstep DIN 51130 Ramp Slip Test

