



Tough Deck

Recycled drainable workplace tiles



- Non-slip interlocking decking for wet areas.
- Combination of substantial product height and large holes offers excellent drainage.
- An economical yet heavy-duty matting solution.
- Easy DIY installation with connectors that conceal joins.
- Ideal for industrial use, especially in areas prone to liquid spillage.
- Ramped edges to prevent trips are available in black or yellow.
- Provides entry level anti-fatigue properties.
- Slip tested to DIN 51130.

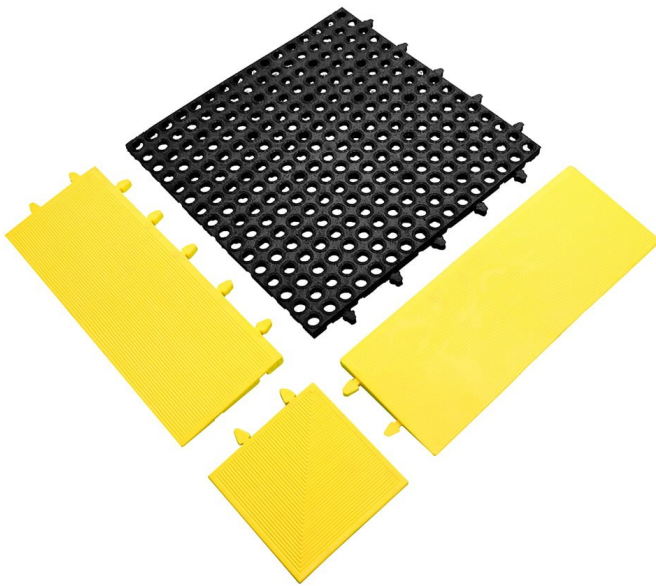

Parts

Part Number	Size	Colour	Weight (kg)
TDC010001	0.18 m x 0.18 m	Black	1.168
TDC070001C	0.18 m x 0.18 m	Yellow	1.6
TDE010001F	0.48 m x 0.18 m	Black	1
TDE010001M	0.48 m x 0.18 m	Black	1
TDE070001F	0.48 m x 0.18 m	Yellow	1.2
TDE070001M	0.48 m x 0.18 m	Yellow	1.4
TDT010001	0.48 m x 0.48 m	Black	1.95

Technical Specifications

Material	Recycled rubber and plastic
Product Height	20 mm
Product Weight	1.95 kg
Hole Size	16 mm
COO (Country of Origin)	South Africa
Slip Tested to	DIN 51130 - R10

Additional Information



Tough Deck Ramp Slip Test DIN 51130

