


Anti-Slip Flat Sheet

Short Description

GRP anti-slip flat sheet is ideal for use in any high traffic area, helping to minimise the risk of slips, trips and falls. Designed to be fitted directly onto many floor surfaces, the simple design allows for quick and easy installation, ensuring limited downtime and disruption. All our GRP flat sheet is manufactured from high quality fibreglass, ensuring longevity and maximum protection.

Product Images



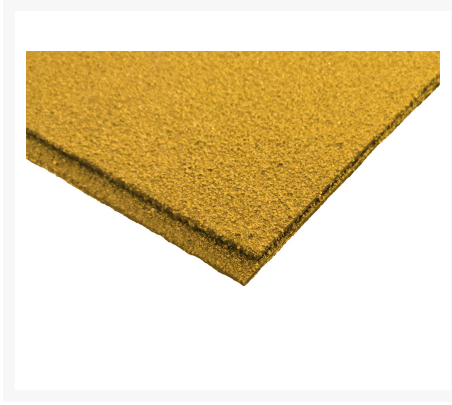

Description

- Moulded fibreglass flat sheet with excellent anti-slip surface.
- Robust construction to withstand heavy usage and harsh environments.
- Impregnated silica grit surface protects against delamination - a common problem with metal backed alternatives.
- Fire-retardant additives ensure excellent fire and heat resistance, conforming to ASTM E84.
- Ideal for walkways, landing platforms and sloped access ramps.
- Overall 4mm thickness.
- Can be cut to bespoke sizes as requested.

Additional Information

Specifications

Wear Resistant	Wear resistant surface to Level 3
Slip Resistance	Slip resistance Level 3
Chemical Resistant	Chemical resistant
Flame Retardant	Flame retardant
Outdoor	Suitable for outdoor use
Dry Area	Suitable for use in dry areas
Grease Area	Suitable for use in greasy areas
Heavy Areas	Suitable for use in heavy use areas
Oil Area	Suitable for use in oily and greasy areas
Wet Area	Suitable for use in wet areas

Environment

Dry Zone	Dry Zone
Wet Zone	Wet Zone
Oily/Greasy Zone	Oily/Greasy Zone
Chemical Zone	Chemical Zone

Tests

- Pendulum Test Value (PTV), Dry 82, Wet 76
- Ignitability, tested to EN ISO 9239-1: 2010
- Radiant panel test for floorings, tested to EN ISO 9239-1
- Anti-slip, tested to BS7976.2
- ASTM E84

Product Options

Colour:	Black
	Grey
	Yellow
Width:	810mm
	1000mm
	1220mm
Length:	1220mm
	2440mm
	3000mm