



Interflex

Short Description

Interflex is a traditional grid welded PVC duckboard matting for use in industrial and commercial environments where slip hazards exist. The matting is designed to self-drain making it suitable for use in wet areas indoors or outdoors and where oil, grease or chemicals exist.

Product Images

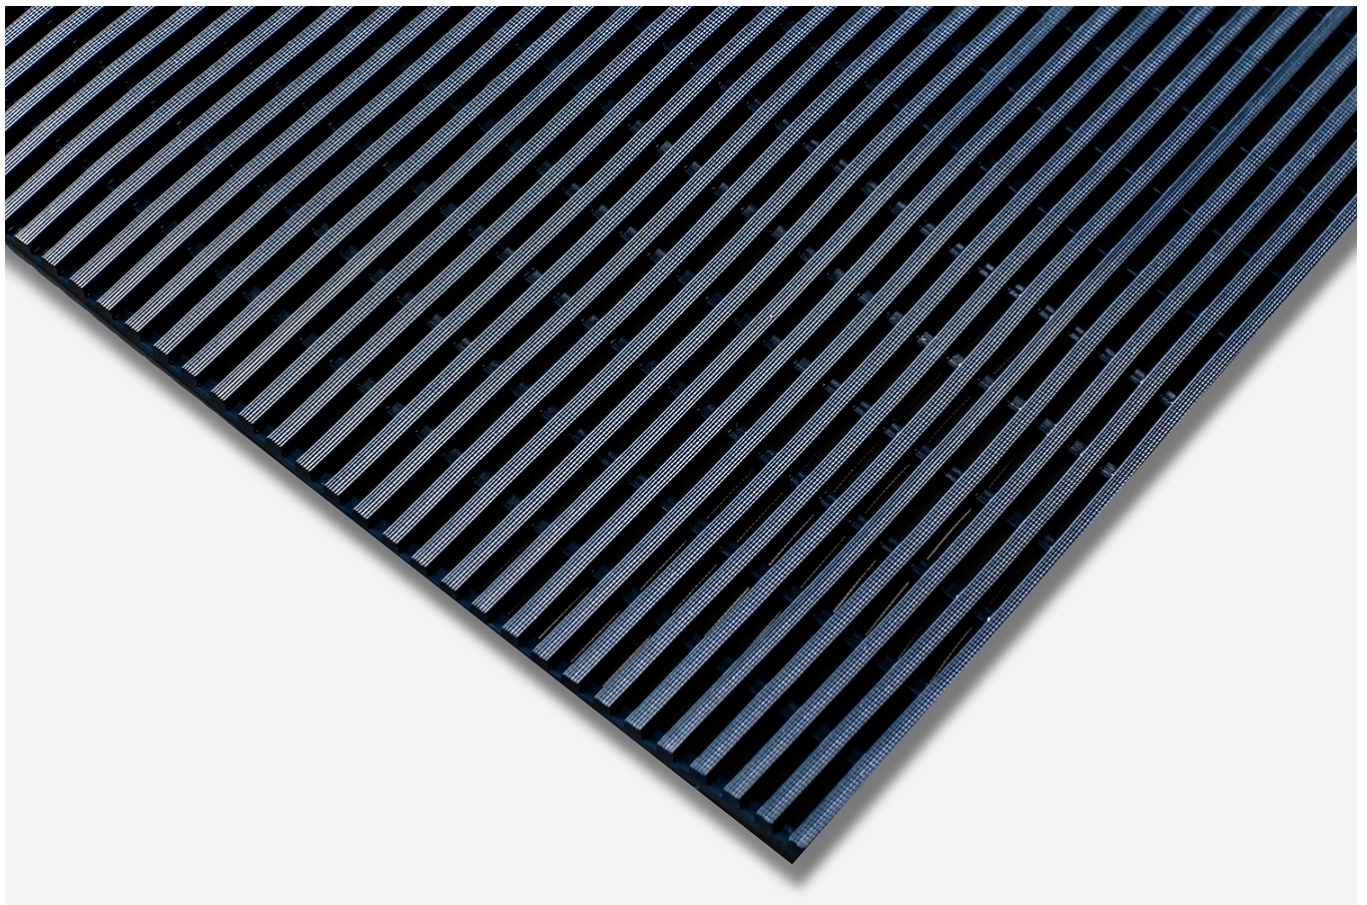

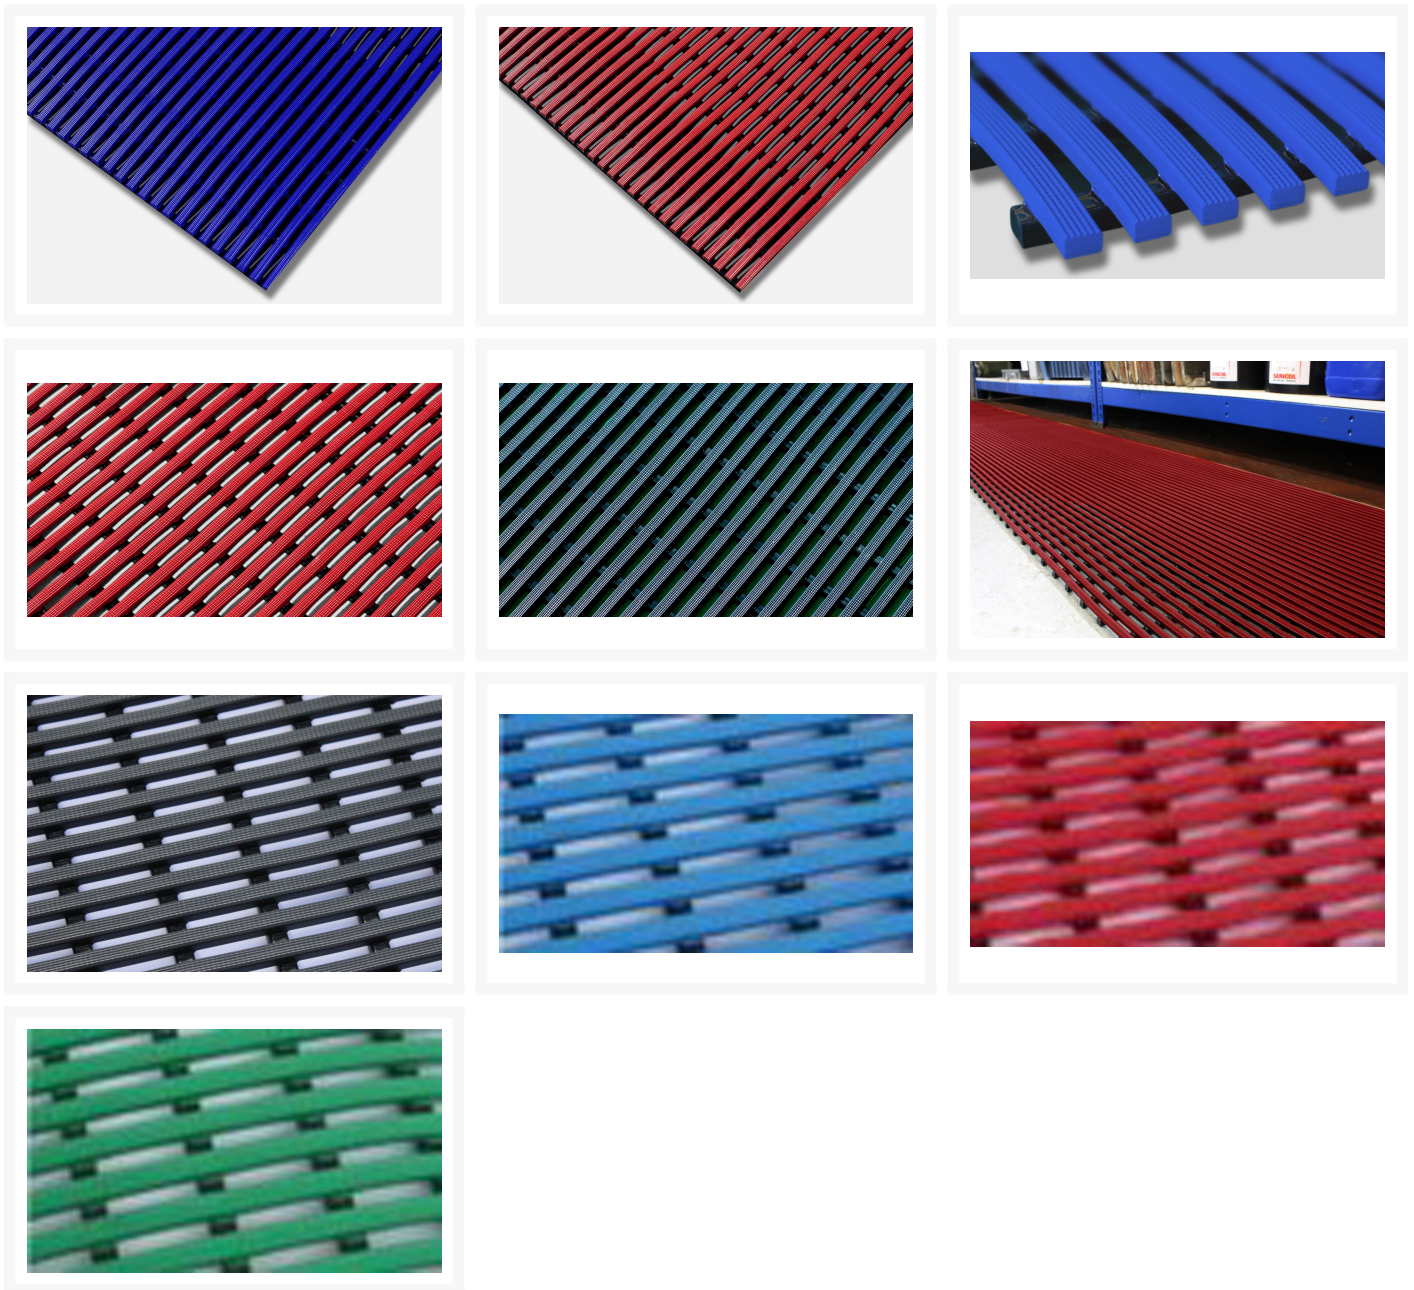

Description

- Oil, grease and chemical resistant recycled PVC with anti-slip surface
- Suitable for medium duty industrial use.
- Provides worker comfort and allows liquids to drain away.
- Connector clips for side or end joining
- Overall height 12.5mm

Specifications

| | |
|--------------------|---|
| Wear Resistant | Wear resistant surface to Level 3 |
| Anti-Fatigue | Anti-fatigue protection to Level 2 |
| Slip Resistance | Slip resistance Level 2 |
| Chemical Resistant | Chemical resistant |
| Connectable | Mats are connectable and join together |
| Oil Area | Suitable for use in oily and greasy areas |
| Wet Area | Suitable for use in wet areas |

Environment

| | |
|------------------|------------------|
| Dry Zone | Dry Zone |
| Wet Zone | Wet Zone |
| Oily/Greasy Zone | Oily/Greasy Zone |
| Chemical Zone | Chemical Zone |

Tests

Temperature resistance -5°C to + 60°C
Slip resistance Classification R10 to DIN 51130

Product Options

| | |
|---------|-------|
| Colour: | Black |
| | Blue |
| | Green |
| | Red |
| Width: | 60cm |
| | 80cm |
| | 100cm |
| | 120cm |
| Length: | 1m |
| | 10m |