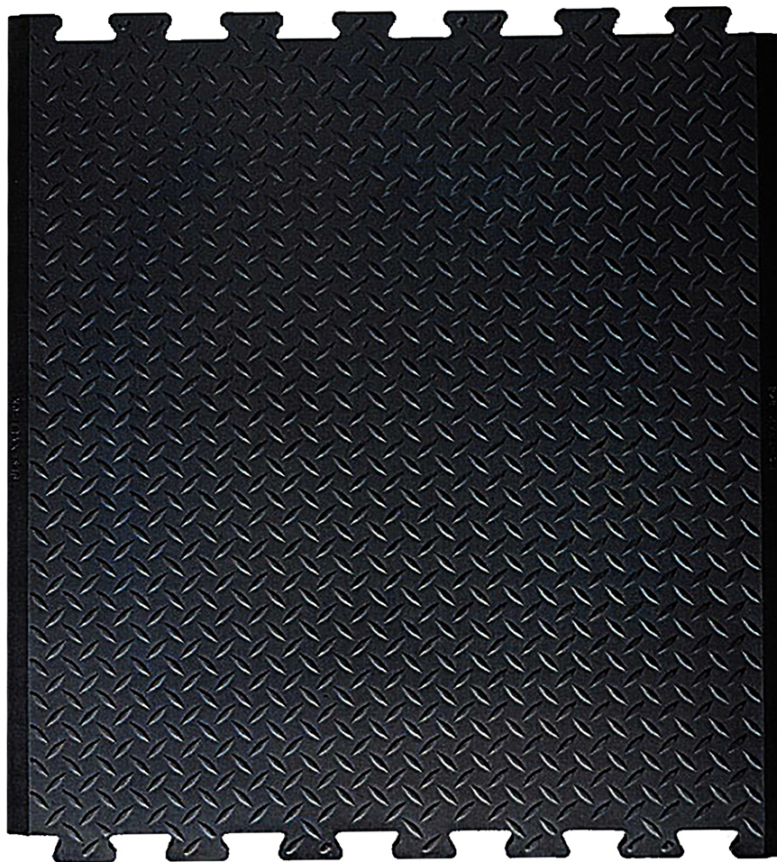
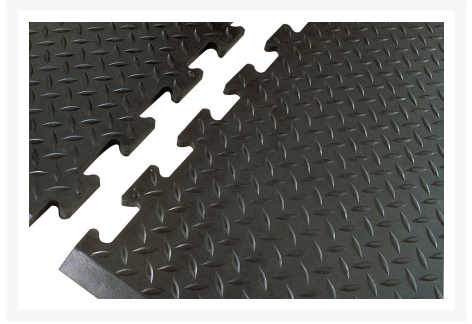
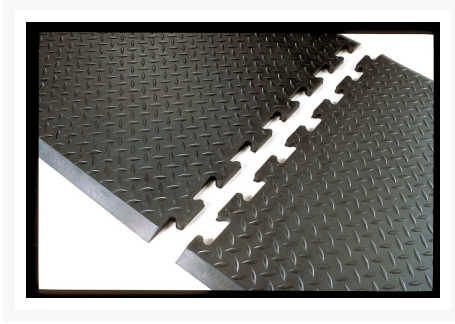

Diamond Interlock

Short Description

Diamond Interlock is a heavy duty, interlocking rubber mat designed for quick and easy on-site installation in dry industrial environments. The mats are available as centre or end pieces for continuous lengths with bevelled edges to all sides for added safety. Along with being a very tough and durable mat, the moulded air pockets to the underside provide extra traction and comfort.

Product Images





Description

- Tough, interlocking rubber mats for simple on-site installation in dry industrial environments.
- Provides easy relocatable continuous lengths
- Suitable for use medium duty use industrial environments
- Trip resistant bevels on all sides
- Deckplate design and moulded air pockets provide traction and ergonomic benefits
- Tough natural rubber compound for added durability
- Overall height 12.7mm

Additional Information

Specifications

| | |
|-------------------------|--|
| Wear Resistant | Wear resistant surface to Level 2 |
| Anti-Fatigue | Anti-fatigue protection to Level 2 |
| Slip Resistance | Slip resistance Level 2 |
| Impact Resistant | Impact resistant |
| Connectable | Mats are connectable and join together |
| Wheeled Area | Suitable for use by wheeled trolleys |
| Dry Area | Suitable for use in dry areas |

Environment

| | |
|-----------------|----------|
| Dry Zone | Dry Zone |
|-----------------|----------|

Tests

Product Testing

- Compression deflection U.S. @ 25% ASTM D575 17.5 lb/in2 @ 50% ASTM D575 56.1 lb/in2
- Foam battery ASTM D3574 40 lb/in2
- Abrasion resistance ASTM D3884-01 1000 Cycles 1.45 g 5000 Cycles
- Static coefficient of friction ASTM C1028-96 0.88
- Elongation ASTM D412
- Breaking load ASTM D412
- Graves tear strength ASTM D 1004
- Hardness ASTM D2240-02
- Anti-slip DIN 51130 and BG-RULE BGR181

Fire Testing

- Critical radiant flux ASTM E-648 0.51 watts/cm2
- Fire retardancy DIN4102 EN 13501-1
- Flammability test ASTM D2859 Pass

Sustainability

- Recyclable material
- Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)

Product Options

Fit: Centre

Edge