


## Worksafe

If greasy floors are a problem, this is your ideal anti-slip mat!



- Improves comfort during prolonged standing.
- Hardwearing making it suitable for many industrial environments – a choice of two materials.
- Blue oil-resistant option is ideal for greasy, oily workstations where slips pose a threat.
- Open holes capture spilt liquids and swarf.
- Effectively reduces slip hazards where spillage is prevalent.
- A complete mat that can be used as immediate safety solution.
- Bevelled edging all round for trip protection.
- Slip tested to DIN 51130.

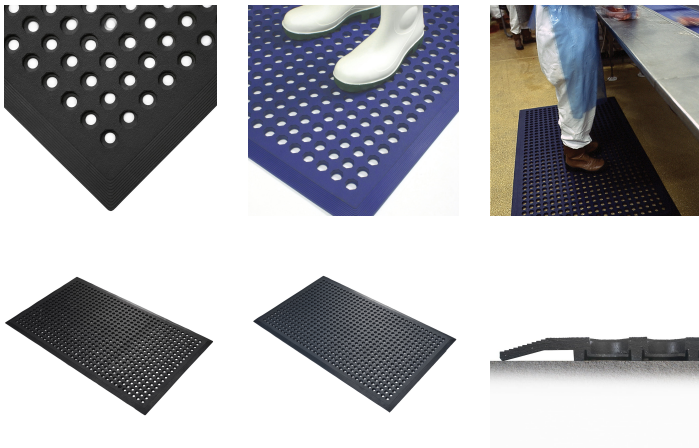

## Parts

Part Number	Size	Colour	Weight (kg)
SW010001	0.9 m x 1.5 m	Black	14
SW020001	0.9 m x 1.5 m	Blue	14

## Technical Specifications

<b>Material</b>	Rubber mix, including >50% recycled material.
<b>Surface Finish</b>	Textured surface with holes
<b>Product Height</b>	12 mm
<b>Hole Size</b>	22 mm
<b>Min. Operating Temperature</b>	-20°C
<b>Max. Operating Temperature</b>	+130°C
<b>Resistance to Chemicals</b>	Natural rubber is resistant to water and most mild acids

<b>Environmental Resistance</b>	Suitable for wet and dry indoor environments
<b>UV Resistance</b>	Yes
<b>Typical Applications</b>	Welding bays, Machine tool areas where swarf is prevalent
<b>Installation Method</b>	Loose Lay
<b>Cleaning Method</b>	Wash with cold water, use vacuum cleaner or use pressure washer to remove dirt
<b>COO (Country of Origin)</b>	IN
<b>Tensile Strength</b>	3.5 to 4 MPa
<b>Notes</b>	Silicone is used in the production process of the mats and a residue will possibly be left on the mat
<b>Slip Tested to</b>	DIN 51130 - R10

## Additional Information



Worksafe Ramp Slip Test DIN 51130

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)1788 228 555 or email [sales@cobaeurope.com](mailto:sales@cobaeurope.com)

[www.cobaeurope.com](http://www.cobaeurope.com)